
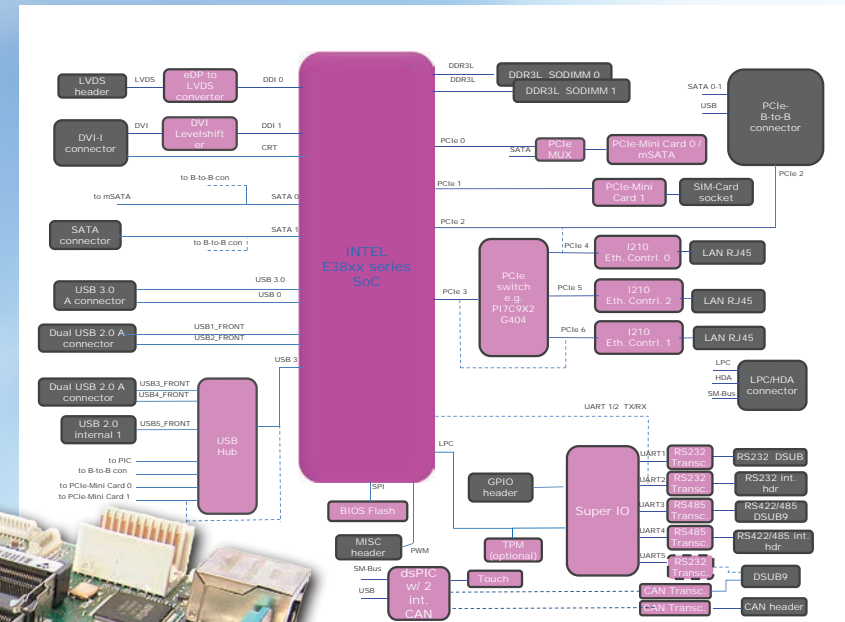


PROFIVE® F38

APPLICATIONS

Designed for fanless applications, the **PROFIVE® F38** single board computer finds its field of work in stationary and mobile devices.

- _ Rugged Industrial Systems
 - no rotating parts, low power
- _ Medical Solutions
 - Intel® Atom™ performance,
 - high-resolution graphics
- _ Automatic Control
 - scalable, long term availability,
 - flexible expansion
- _ Measurement
 - Multiple Graphics
- _ Public Terminal
 - Digital Signage, Multiple Displays support

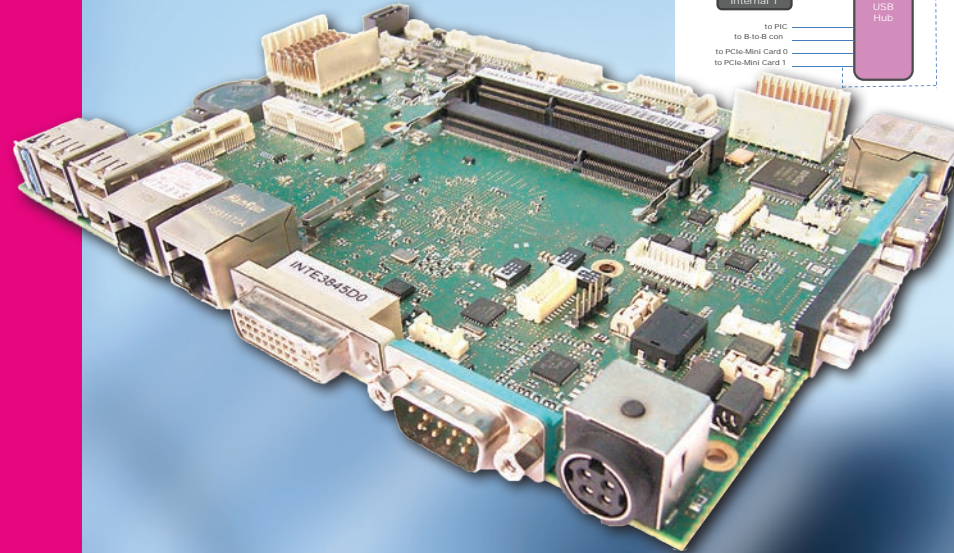

Made in Germany



E.E.P.D. 
...just embedded!


SPECIFICATIONS

CPU	Intel® Atom™ processors Single, Dual (opt.) and Quad Core †
BIOS	UEFI-BIOS
Max. memory	Up to 8 GB DDR3L memory supports 667 MHz
Gigabit Ethernet	Up to 3 (Intel® I210)
PCI Express® Mini Card	Up to 2 fullsize sockets; 1 with SIM Card socket and 1 mSATA
Serial ATA	Yes
USB ports	Up to 6 USB 2.0; 1 USB 3.0
COM ports	3 RS-232 2 RS-422/485
CAN bus	2 ports (optional)
SM / LPC bus	Yes
LVDS connector	Yes, 24-bit dual channel with backlight connector
DVI-I connector	Yes
Sound	4-channel HDA and headphone connector
Touch controller	Supports 4- and optional 8-wire touch panels
Health monitoring and management	Controllable fan, hardware monitoring, backlight control and Watchdog
Power supply	Min. 8 V / Max. 32 V, internal power or optional 4-pin Mini DIN power
Max. operating temperature	0°C to +60°C ambient or 0°C to +70°C at any point on the surface -40°C to +85°C ambient industrial grade (optional)
Max. storage temperature	-20°C to +105°C
Max. rel. humidity	95% @ 40°C, non-condensing
Fanless	Designed for fanless operation
Size approx.	180 mm x 135 mm
OS support	Microsoft® Windows® 7; Microsoft® Windows® 10; Microsoft® Windows® 10 IoT Core; Linux Ubuntu 16.04 LTS


Ordering Code CPU	Description	Type
F38LC	SBC	E3815 / 1.46 GHz / 512 KB cache / 1 RAM / 2 GbE
F38HC	SBC	E3845 / 1.91 GHz / 2 MB cache / 2 RAM / 3 GbE

other on request


Ordering Code Memory	Description	Size
2GB-F38X	Main Memory	2 GB
4GB-F38X	Main Memory	4 GB
8GB-F38X	Main Memory	8 GB

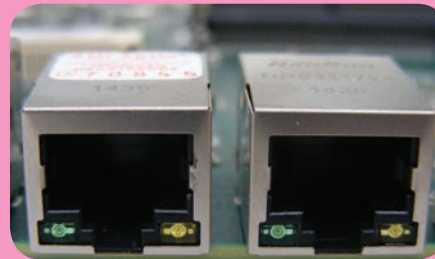


Gigabit Ethernet

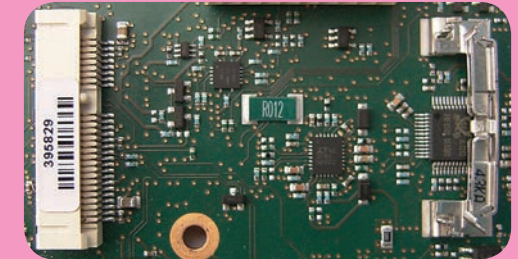

PCI Express® Mini Card

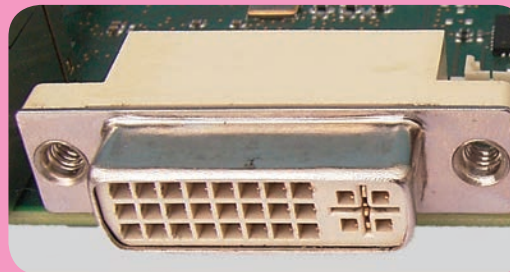

DVI-I Connector

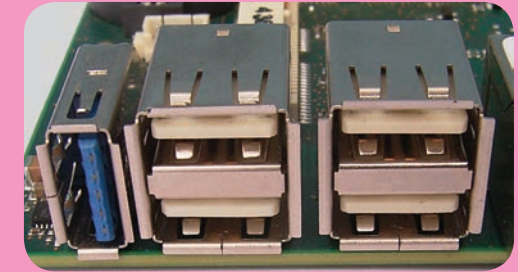

USB Ports

† 15 years availability according to CPU manufacturers specification



TÜV SÜD approved
quality management
system

The information contained in this document has been carefully checked and is believed to be reliable. However, E.E.P.D. GmbH makes no guarantee or warranty concerning the accuracy of said information and shall not be responsible for any loss or damage of what ever nature resulting from the use of, or reliance upon, it. E.E.P.D. does not guarantee that the use of any information contained herein will not infringe upon the patent, trademark, copyright or other rights of third parties, and no patent or other license is implied hereby. Intel® and Intel® logo are trademarks or registered trademarks of Intel® Corporation or its subsidiaries in the United States and other countries.

This document does not in any way extend E.E.P.D.'s warranty on any product beyond that set forth in its standard terms and conditions of sale. E.E.P.D. reserves the right to make changes in the products or specifications, or both, presented in this publication at any time and without notice.

LIFE SUPPORT APPLICATIONS

E.E.P.D.'s products are not intended for use as critical components in life support appliances, devices or systems in which the failure of a E.E.P.D. product to perform could be expected to result in personal injury. All mentioned trademarks are registered trademarks of their owner.

© 2017 by E.E.P.D. GmbH. All rights reserved. October 5th 2017 - Version 2.7

**E.E.P.D Electronic Equipment
Produktion & Distribution GmbH**
Gewerbering 3
85258 Weichs - Germany
Phone +49 8136 2282-0
Fax +49 8136 2282-509
Internet: www.eepd.de
E-Mail: sales@eepd.de