



APPLICATIONS

The **EM BSIP-NUCT** is a german engineered and produced high quality fanless BoxPC System. Designed as a flexible low power system with an excellent performance-per-watt ratio it is optimal adapted for:


- _ Rugged Industrial Systems
 - no rotating parts, low power,
 - extended temperature
- _ Medical Solutions
- _ CV Computer Vision
- _ Robotics
- _ Micro-Server
- _ High-Performance Workstations
- _ IoT
 - edge / fog gateway



¹15 years availability according to CPU manufacturers specification

SPECIFICATIONS

CPU	Intel® Celeron® Processor 6000 Series ¹ 11th Generation Intel® Core™ i3, i5 and i7 Processors ¹ up to 4 cores, 8 threads, max. 28W supported
Max. memory	32 GB dual channel DDR4-3200 SO-DIMM memory; industrial grade variants with In-Band ECC
Gigabit Ethernet	2 Intel® I226 with 2,5 Gbit/s with IEEE1588, TSN-support, Wake-On-Lan supported by one port
M.2 socket	1 Key B, 30 mm x 42 mm 1 Key E, 22 mm x 30 mm 1 Key M, 22 mm x 42 mm (NVMe with PCIe4)
USB ports	2 USB 3.1 Gen2 + 2 USB 2.0 (internal)
USB-C connector	1 USB-C 3.1 Gen2 or 1 DP++ output up to 4096 x 2160 @ 60 Hz
DP connectors	2 Mini-DP++ connectors up to 4096 x 2160 @ 60 Hz
Serial port	2 RS-232/485 (HDX/FDX)
Sound	HDA with MIC in / Headphone out at a 3,5 mm Audio Jack / Line in / Line out
TPM	TPM 2.0 support (Infineon SLB 9670)
Health monitoring and management	Hardware monitoring and watchdog
Power supply	Min. 8 V / Max. 32 V (DC) automotive grade KL15
Max. operating temp.	0°C to +60°C ambient commercial grade; -40°C to +85°C ambient industrial grade Depending on variant
Max. storage temp.	-40°C to +85°C
Max. relative humidity	95% @ 40°C, non-condensing
Size approx.	130 x 52 x 217 mm
Weight approx.	1.480g + options
OS support	Microsoft® Windows® 11 Microsoft® Windows® 10 Microsoft® Windows® 10 IoT Enterprise Linux Ubuntu 20.04 LTS

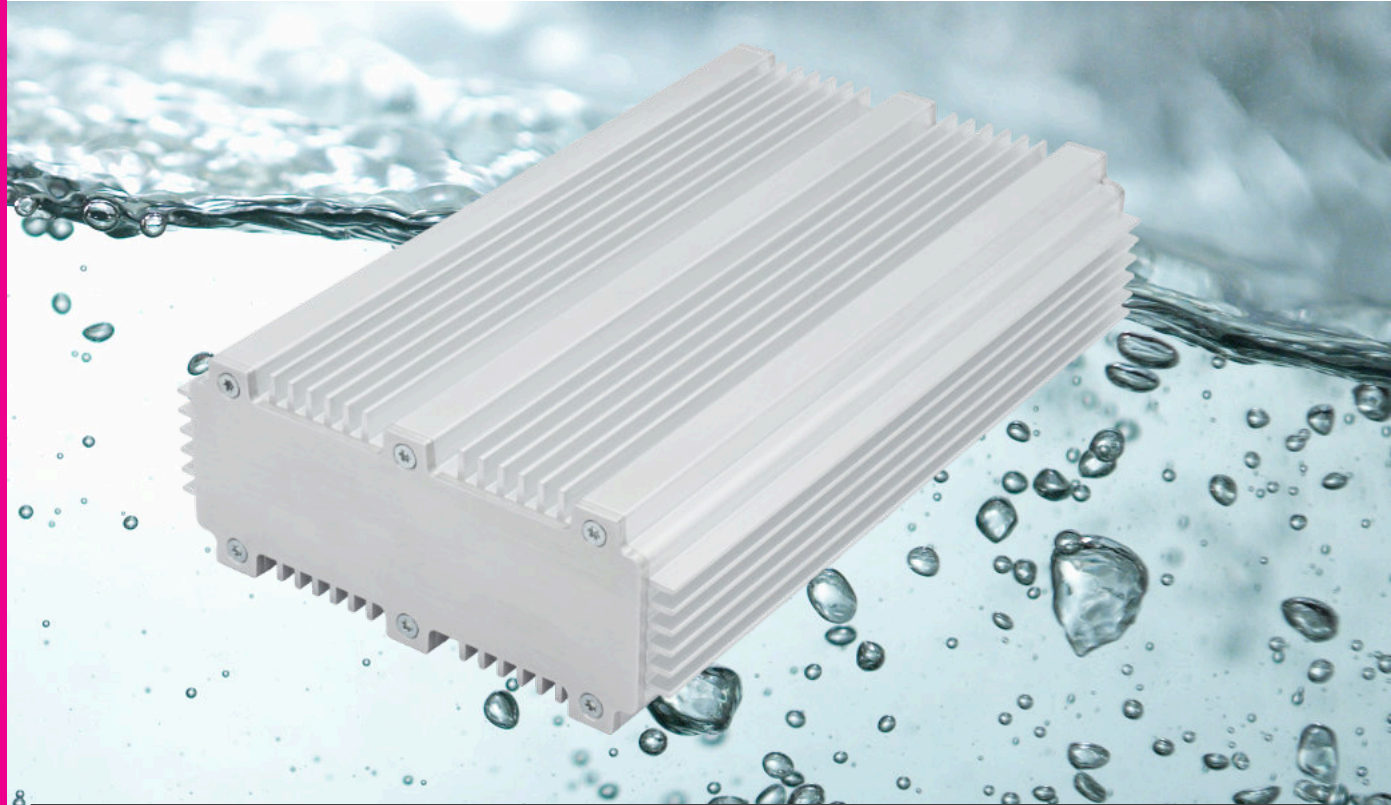

Ordering Code System	Description	Type	Max. Operating temp
BSIP_NUCTA	eNUC System	INTC6305E 2C 2T 1.8 GHz 15W	0°C to +60°C
BSIP_NUCTC	eNUC System	I5-1145G7E 4C 8T 1.5 GHz - 4.1 GHz / 12 - 28W	0°C to +60°C
4GB-NUCT	Main Memory	4 GB	
8GB-NUCT	Main Memory	8 GB	
16GB-NUCT	Main Memory	16 GB	
32GB-NUCT	Main Memory	32 GB	

The information contained in this document has been carefully checked and is believed to be reliable. However, E.E.P.D. GmbH makes no guarantee or warranty concerning the accuracy of said information and shall not be responsible for any loss or damage of what ever nature resulting from the use of, or reliance upon, it. E.E.P.D. does not guarantee that the use of any information contained herein will not infringe upon the patent, trademark, copyright or other rights of third parties, and no patent or other license is implied hereby. AMD and the AMD logo are trademarks of Advanced Micro Devices, Inc. Intel and the Intel logo are trademarks of Intel Corporation or its subsidiaries in the U.S. and/or other countries.

This document does not in any way extend E.E.P.D. 's warranty on any product beyond that set forth in its standard terms and conditions of sale. E.E.P.D. reserves the right to make changes in the products or specifications, or both, presented in this publication at any time and without notice.

LIFE SUPPORT APPLICATIONS: E.E.P.D. 's products are not intended for use as critical components in life support appliances, devices or systems in which the failure of a E.E.P.D. product to perform could be expected to result in personal injury. All mentioned trademarks are registered trademarks of their owner.

© 2024 by E.E.P.D. GmbH. All rights reserved. November 18 2024 – Version 1.2

**E.E.P.D. Electronic Equipment
Produktion & Distribution GmbH**
Gewerberg 3
85258 Weichs - Germany
Phone +49 8136 2282-0
Internet: www.eepd.de
E-Mail: sales@eepd.de