



APPLICATIONS

The **EM® MODULE MCAN** is the perfect controller area network module solution. It is designed for safety networking to control different devices and sensor units. It is a german engineered and high quality USB extension module, offering the highest performance in tough environments.

- _ Rugged Industrial Module
- _ Automatic Control Panels
- _ Information Systems
- _ Measurement & Quality Control
- _ Automotive

**CAN 2.0
A/B
2 PORTS**



Connect up to seven modules per TB-M/TB-H to your system.



Small installation depth.



Two independent CAN ports with status LED's to support various applications.



Use the MCAN in harsh and tough environments.



Galvanic isolation optional available for both CAN ports.




Designed for hat rail / DIN rail mounting.

SPECIFICATIONS

Serial port	9-pin female D-SUB connector 2 CAN ports: Standard CAN (Version 2.0A) Extended CAN (Version 2.0B) Bit rate 20 kBit/s up to 1 MBit/s
CAN transceiver	NXP TJA 1042TK
Status LED's	2 LED's
Galvanic isolation	500 V Only on "B" versions See ordering codes
USB client port	1 USB 2.0 USB 1.1 Type A
Power supply	USB VCC (+5 V supply, current limited to 500 mA)
Fanless	Designed for fanless operation
Max. operating temp.	-40°C to +85°C ambient
Max. storage temp.	-40°C to +85°C ambient
Max. rel. humidity	95% @ 40°C, non-condensing
Housing	ABS-PC
Mounting	TB-M and TB-H module mounting Hat rail Stand alone
Dimensions approx.	93 x 39 x 27 mm
Weight approx.	40 grams
Conformity	CE, ROHS, REACH
Driver Support	SocketCAN; CANopen®
OS support	Microsoft® Windows® 10; Microsoft® Windows® 10 IoT Enterprise; Linux Kernel 3.4 or later
Control Type	Virtual Com Port

HIGHLY COMPATIBLE INDUSTRIAL TEMP -40°C TO +85°C

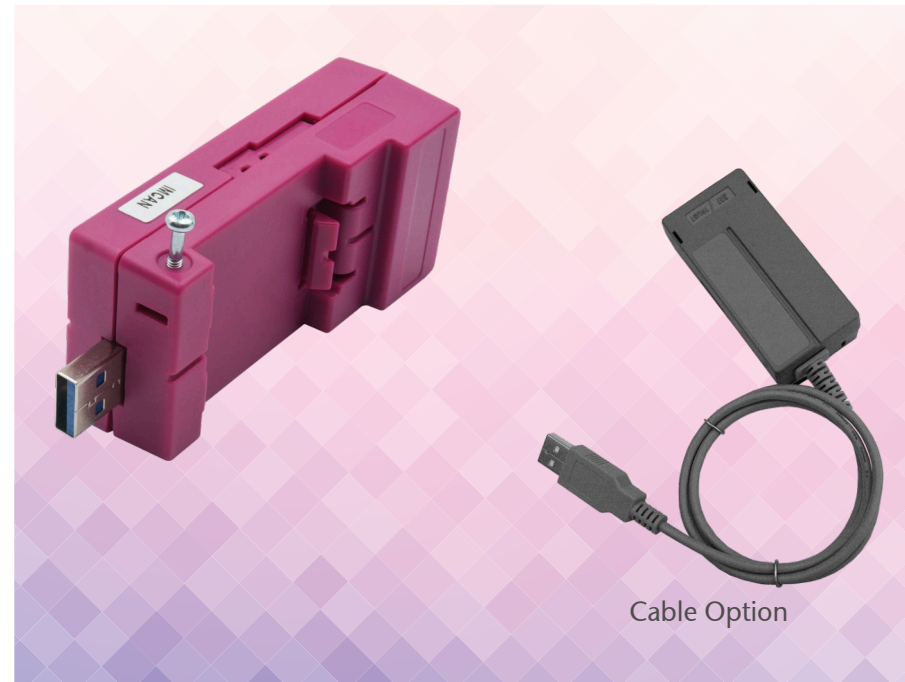

OVERVIEW

The EM® MODULE MCAN is the perfect USB to CAN adapter for your applications, powered by proven technology. It is designed for safety networking to control different devices and sensor units. The module is ready for USB 2.0/1.1 and has two CAN ports.

SUMMARY

- ▶ 2 independent CAN ports
- ▶ CAN 2.0A/2.0B
- ▶ Max. bit rate 1 MBit/s
- ▶ Galvanic isolation optional

Ordering Code System	Type
IMCANAA0	2x CAN 1 MBit/s Rail Mounting GREY
IMCANAA30	2x CAN 1 MBit/s Rail Mounting MAGENTA
IMCANAC0	2x CAN 1 MBit/s Hat rail or stand alone mounting GREY USB cable 80 cm
IMCANBA0	2x CAN 1 MBit/s 500 V galvanic isolated Rail Mounting GREY
IMCANBA30	2x CAN 1 MBit/s 500 V galvanic isolated Rail Mounting MAGENTA
IMCANBC0	2x CAN 1 MBit/s 500 V galvanic isolated GREY Hat rail or stand alone mounting USB cable 80 cm

The information contained in this document has been carefully checked and is believed to be reliable. However, E.E.P.D. GmbH makes no guarantee or warranty concerning the accuracy of said information and shall not be responsible for any loss or damage of what ever nature resulting from the use of, or reliance upon, it. E.E.P.D. does not guarantee that the use of any information contained herein will not infringe upon the patent, trademark, copyright or other rights of third parties, and no patent or other license is implied hereby. ENVADER® is a registered trademark of the E.E.P.D. GmbH. Intel, Celeron, Core and the Intel logo are trademarks or registered trademarks of Intel Corporation or its subsidiaries in the United States and/or other countries. Windows is a registered trademark of Microsoft Corporation in the United States and/or other countries. Linux® is the registered trademark of Linus Torvalds in the U.S. and other countries. This document does not in any way extend E.E.P.D.'s warranty on any product beyond that set forth in its standard terms and conditions of sale. E.E.P.D. reserves the right to make changes in the products or specifications, or both, presented in this publication at any time and without notice. LIFE SUPPORT APPLICATIONS: E.E.P.D.'s products are not intended for use as critical components in life support appliances, devices or systems in which the failure of a E.E.P.D. product to perform could be expected to result in personal injury. All mentioned trademarks are registered trademarks of their owner.
© 2024 by E.E.P.D. GmbH. All rights reserved. March 6 2024 – Version 2.2

**E.E.P.D Electronic Equipment
Produktion & Distribution GmbH**
Gewerbering 3
85258 Weichs - Germany
Phone +49 8136 2282-0
Internet: www.eepd.de
E-Mail: sales@eepd.de