




APPLICATIONS

The EMTrust 3U backplanes are designed according to the PICMG 2.0 R3.0 specification, and are an essential commodity for all 3U CompactPCI applications in:

- ▶ Rugged Embedded Systems
- ▶ Avionics/Military
- ▶ Robotics
- ▶ Environment Management
- ▶ Energy Management
- ▶ Industrial Control and Automation
- ▶ Multimedia "Infotainment"
- ▶ Traffic and Transportation
- ▶ Multiprocessing Environments

ICP-BPL

PICMG 2.0 R3.0 CompactPCI Backplanes

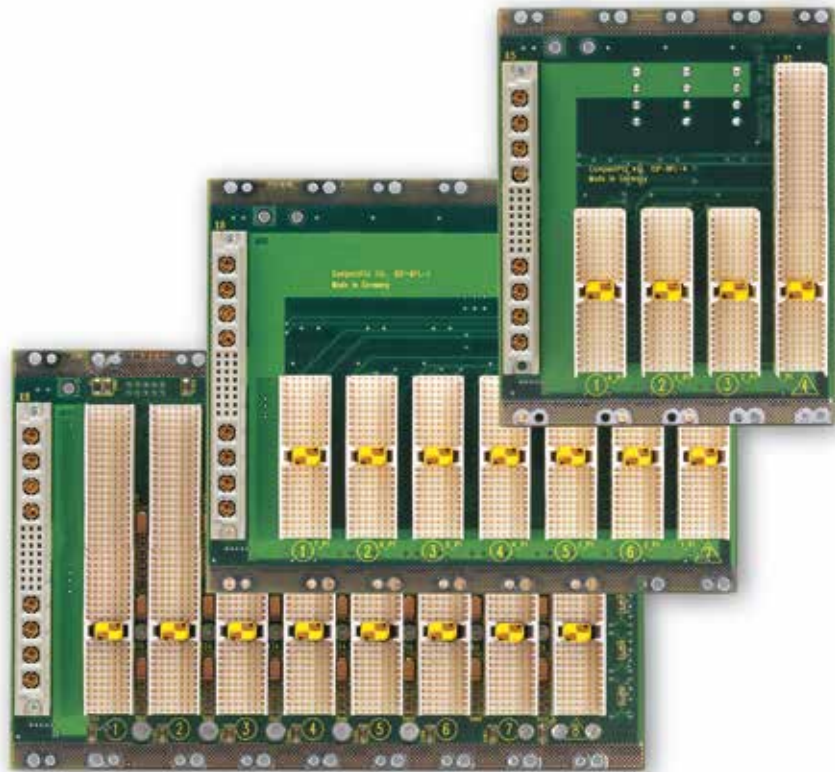

ICP-BPL

FEATURES

- ▶ Single slot to eight slot
- ▶ Rear I/O on system slot
- ▶ Optional rear I/O on all slots
- ▶ Zero-slot power backplane
- ▶ DIN 41612 type M power connector
- ▶ For use at extended operational temperatures
- ▶ Extremely robust, thick PCB
- ▶ 3.3V I/O or 5.0 V I/O options

BENEFITS

- ▶ System optimization through slot multiplicity
- ▶ Passive technology for long operational life
- ▶ Industrial rigidity & stability
- ▶ Long-term product availability
- ▶ Superior compatibility
- ▶ Open standard architecture





ICP-BPL

EM Compact

OVERVIEW

A passive backplane is a circuit board without any active elements (silicon) but does include peripheral board connection slots into which I/O devices, processors, and other computer and network components may be installed.

In a passive backplane system, the system bus is used to interconnect a plug-in processor board and multiple plug-in add-on boards.

This architecture makes rapid repair by board substitution possible, and system upgrades and changes are greatly simplified, with minimum resulting system downtime. In fact, the development of passive backplane based systems has been driven by the desire to improve the mean time to repair (MTTR) and to provide an easier path for system upgrade.

SPECIFICATION SUMMARY:

- ▶ PICMG 2.0 R3.0
- ▶ 1 to 8 slots
- ▶ '0' slot power backplane
- ▶ DIN 41612 type M power connector
- ▶ Extended operational temperature

SPECIFICATIONS

COMPLIANCE

PICMG 2.0 R3.0

INTERFACES

The standard 1 to 8 slot backplanes all have the following interfaces:

- ▶ DIN 41612 type M connector
- ▶ 1 to 8 32-bit J1 connectors
- ▶ J2 on master slot only
- ▶ Master slot rear I/O connector
- ▶ Molex power connector

The zero slot or power backplane observes the following:

- ▶ DIN 41612 type M connector
- ▶ Power rails for connectivity
- ▶ ATX power connector

PLUG-IN CONNECTORS

2 mm press-fit connectors, grade 2 quality

POWER SUPPLY

Screw-type terminals, blade connectors, ATX connectors, socket connectors to DIN 41 612 type M, depending on variant

SUPPLY VOLTAGE (V I/O)

3.3V / 5 V jumper selected

8-SLOT TERMINATION

On-board Schottky barrier diodes

TRANSFER MODE

32-bit

CLOCK FREQUENCY

33 MHz

PCB THICKNESS

2.8 mm to 3.5 mm ($\pm 10\%$) depending on backplane size (number of slots)

MASS (PER SLOT)

45g + (No. slots x 25g) $\pm 10\%$

DIMENSIONS

All dimensions are given in mm (height x width)
A 128 x 22.3 + (No. slots x 20.32)

CLIMATIC CONDITIONS

-40°C to +85°C (standard)
-40°C to +85°C (storage)
Humidity 0% to 90% @ 40°C (non-condensing)

MANUFACTURE

Manufactured using fibreglass epoxy according to DIN 40802 (type FR4), this design is optimized for best HF behaviour

ORDERING INFORMATION

PRODUCT	DESCRIPTION
ICP-BPL-nM50-3.0	One to eight slot, PICMG 2.0 R3.0 3U CompactPCI passive backplane with 5.0 V I/O complete with DIN 41612 type M power connector. Replace 'n' with the no. of slots for the complete ordering code
ICP-BPL-0M00	Zero slot or power backplane with DIN 41612 type M power connector and power-rails

Notes:
Other backplanes including 64-bit, full rear I/O, 3.3 V I/O, or powerless may be available. Please contact an EMTrust sales representative for more information



EMTrust GmbH
Headquarters
Gewerbering 1
85258 Weichs - Germany
Phone +49 8136 80 677-800
Fax +49 8136 80 677-809
sales@emtrust.de
www.emtrust.de

Trucomp, Inc.
11555 Heron Bay Blvd
Suite 200
Coral Springs, FL 33076 - USA
Phone +1 954 603-0582
Fax +1 954 603-0581
sales@trucompusa.com
www.trucompusa.com

The information contained in this document has been carefully checked and is believed to be reliable. However, EMTrust GmbH makes no guarantee or warranty concerning the accuracy of said information and shall not be responsible for any loss or damage of what ever nature resulting from the use of, or reliance upon, it. EMTrust does not guarantee that the use of any information contained herein will not infringe upon the patent, trademark, copyright or other rights of third parties, and no patent or other license is implied hereby. Intel and Intel logo are trademarks or registered trademarks of Intel Corporation or its subsidiaries in the United States and other countries.
This document does not in any way extend EMTrust's warranty on any product beyond that set forth in its standard terms and conditions of sale. EMTrust reserves the right to make changes in the products or specifications, or both, presented in this publication at any time and without notice.
LIFE SUPPORT APPLICATIONS
EMTrust's products are not intended for use as critical components in life support appliances, devices or systems in which the failure of a EMTrust product to perform could be expected to result in personal injury. All mentioned trademarks are registered trademarks of their owner.
© 2013 EMTrust GmbH. All rights reserved. Rev. 1.4 / 21.11.2013