



# BOXPC-MIITX

**EM TRUST**  
systems you can trust

## APPLICATIONS

The **EM BoxPC-MIITX** is the perfect Plug&Play BoxPC solution for vehicles applications. It is a german engineered and produced high quality BoxPC system and optimal adapted for:

- \_ Mobile BoxPC for Commercial / Industrial Vehicles
  - automotive power input,
  - small form factor
- \_ Measurement
  - USB client port, multiple graphics
- \_ Automatic Control
  - scalable, long term availability,
  - flexible expansion
- \_ Rugged Industrial Systems
  - designed for low-power, noiseless and demanding temperature environments

## MINI-ITX



Alternate Housing Option



Easy expansion with CAN, Analog/Digital IO, Relay, RS232 and RS485.



High speed communication with USB 3.0 and Gigabit Ethernet.



The BoxPC starts automatically by ignition on and shut down with a time delay by ignition off.



Mobile BoxPC system in a strong aluminum housing.



Fanless passive cooling and aluminum housing.



Optimized mobile BoxPC for automotive DC input.

HIGH QUALITY  
MADE IN GERMANY

15 years long life support<sup>1</sup>

12/24 V


**E.E.P.D.**   
...just embedded!

## SPECIFICATIONS

CPU	Intel® 7th Generation Core™ processors <sup>1</sup>
Max. memory	Up to 32 GB DDR4 dual-channel memory support up to 2133 MT/s
Gigabit Ethernet	2 Intel® integrated GbE/I211
LTE/4G (OPTIONAL)	300 Mbps max./EMEA, APAC/Diversity/GNSS
WiFi/BT (OPTIONAL)	802.11 AC with diversity/Bluetooth Version 5
SSD (OPTIONAL)	M.2 SATA / 64 - 512 GB
SD-Card	1 MicroSD-Card socket
USB ports	4 USB 3.1 Gen1
Display Port connectors	2 connectors; up to 4096 x 2304 @ 60 Hz
Sound	3.5 mm MIC In / headphone Out / line In
Health management	Hardware monitoring and Watchdog
Other	Power and status LEDs
Power supply	Min. 8 V / Max. 32 V (DC) automotive grade   KL15
Fanless	Designed for fanless operation
Max. operating temp.	0°C to +60°C ambient commercial grade
Max. storage temp.	-20°C to +85°C
Max. rel. humidity	95 % @ 40°C, non-condensing
Housing	Aluminum case
Mounting	Stand alone or hat rail
Dimensions approx.	240 x 71 x 250 mm
Weight approx.	1750 grams + options
Conformity	CE, ROHS, REACH
OS support	Microsoft® Windows® 10; Microsoft® Windows® 10 IoT Enterprise; Linux (Ubuntu 18.04 LTS, Yocto Project 2.2)

<sup>1</sup>15 years availability according to CPU manufacturers specification

## EASY CUSTOMIZABLE BY A LARGE NUMBER OF OPTIONS

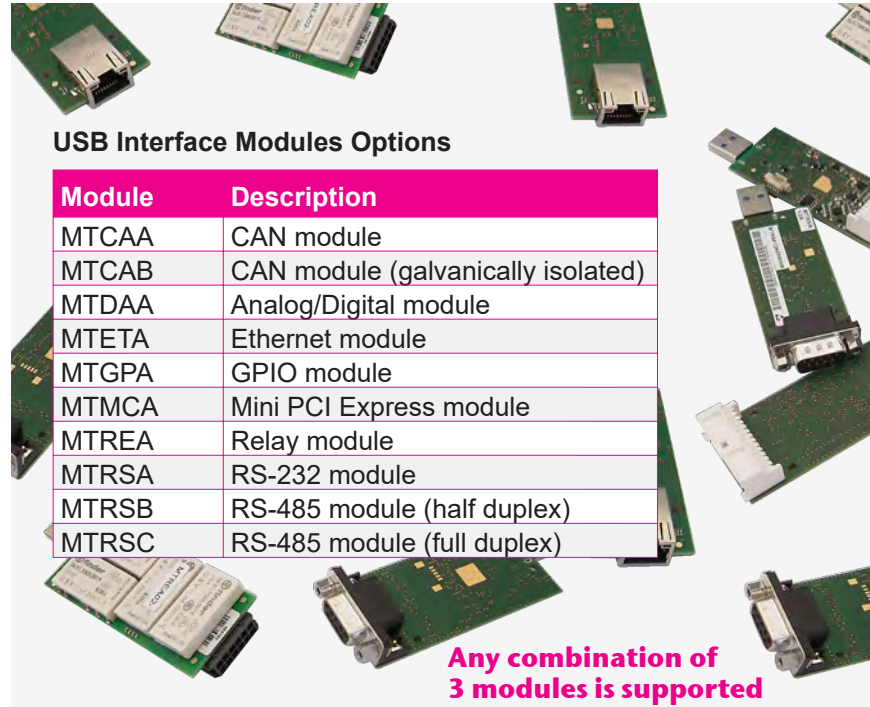

**USB Interface Modules Options**

Module	Description
MTCAA	CAN module
MTCAB	CAN module (galvanically isolated)
MTDAA	Analog/Digital module
MTETA	Ethernet module
MTGPA	GPIO module
MTMCA	Mini PCI Express module
MTREA	Relay module
MTRSA	RS-232 module
MTRSB	RS-485 module (half duplex)
MTRSC	RS-485 module (full duplex)

**Any combination of 3 modules is supported**

Ordering Code System	Description	Type
BPCMA	Mini ITX System	Celeron 3965U / 2C / 2T / 2.2 GHz / 10 - 15 W
BPCMIC	Mini ITX System	i3-7100U / 2C / 4T / 2.4 GHz / 7.5 - 15 W
BPCMIE	Mini ITX System	i5-7300U / 2C / 4T / 3.5 GHz / 7.5 - 25 W
BPCMIG	Mini ITX System	i7-7600U / 2C / 4T / 3.9 GHz / 7.5 - 25 W
4GB-MIITX	Main Memory	4GB
8GB-MIITX	Main Memory	8GB
16GB-MIITX	Main Memory	16 GB

## OVERVIEW

The EM BoxPC-MIITX is the ideal industrial grade BoxPC for versatile applications in all kind of vehicles and by many further useages.

Up to three interfaces options in different possible combinations allow a universal expansion of the system.

## SUMMARY

- ▶ Aluminum case
- ▶ Passive cooled
- ▶ Uninterruptible power supply
- ▶ Wireless options
- ▶ Easy mounting

OPTION	Description
SSA	SATA SSD 64 - 512 GB
LTE	LTE/4G Modem not in combination with WBT
WBT	WiFi/BT card not in combination with LTE
W10	Microsoft® Windows® 10
WIE	Microsoft® Windows® 10 IoT Enterprise
LNx	Linux Ubuntu 18.04 LTS



The information contained in this document has been carefully checked and is believed to be reliable. However, E.E.P.D. GmbH makes no guarantee or warranty concerning the accuracy of said information and shall not be responsible for any loss or damage of what ever nature resulting from the use of, or reliance upon, it. E.E.P.D. does not guarantee that the use of any information contained herein will not infringe upon the patent, trademark, copyright or other rights of third parties, and no patent or other license is implied hereby. ENVADER® is a registered trademark of the E.E.P.D. GmbH. Intel and the Intel logo are trademarks of Intel Corporation or its subsidiaries in the U.S. and/or other countries. This document does not in any way extend E.E.P.D.'s warranty on any product beyond that set forth in its standard terms and conditions of sale. E.E.P.D. reserves the right to make changes in the products or specifications, or both, presented in this publication at any time and without notice. LIFE SUPPORT APPLICATIONS: E.E.P.D.'s products are not intended for use as critical components in life support appliances, devices or systems in which the failure of a E.E.P.D. product to perform could be expected to result in personal injury. All mentioned trademarks are registered trademarks of their owner. © 2021 by E.E.P.D. GmbH. All rights reserved. June 30<sup>th</sup>2021 – Version 2.5

**E.E.P.D. Electronic Equipment  
Produktion & Distribution GmbH**  
Gewerbering 3  
85258 Weichs - Germany  
Phone +49 8136 2282-0  
Fax +49 8136 2282-109  
Internet: www.eepd.de  
E-Mail: sales@eepd.de